



WORK TOGETHER MUTUAL-WIN-WIN



北京华泰路达科技有限公司
Wistron Industrial Limited
Cell:+86 15001021506
Email:info@wistronchina.com
Website:www.wistronchina.com
Add: 801, No.369 Huiyang Street, ZOL Innovation Base,
Xingye Road, Jingxiu District, Baoding City, Hebei Province,China



北京华泰路达科技有限公司

Company profile 公司简介

Our company is a high-tech enterprise specializing in research and development, production and sales of mid-to-high-end intelligent traffic safety products. Since its establishment, it has been committed to the technical research, development and sales of intelligent traffic safety products. The main products include: solar road stud, solar road signs, solar traffic lights, smart zebra crossings, traffic cone, rubber safety products, etc. The company has 3 large injection molding machines and more than 10 small and medium-sized injection molding machines, and have injection molding machine's workshop, independent die-casting aluminum workshop, two electronic welding production lines and dust-free production line. Mature injection molding technology and die-cast aluminum technology, we can meet customers' unique design plans. At the same time, our team can be based on different application scenarios provide customers with customized solutions and products to achieve one-stop purchasing. Products are exported to Southeast Asia, the United States, Mexico, the Middle East, South Africa and other parts of the world.



Certificate of honor 荣誉证书




WORK SHOP 车间图




Customer photo 客户合影




» Solar Road Stud 太阳能道钉

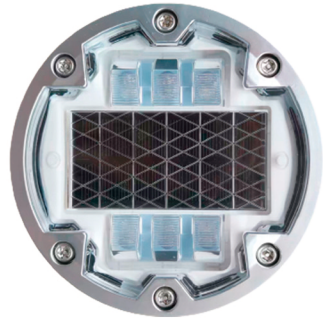


Model	HT-RS-SG300 (IL300)
Solar panel	5V 140ma
Battery	3.2V 1500mah Lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>1000 meters
Control of light intensity	400~500Lux
Lifetime	5-8 years
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	143×50mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.

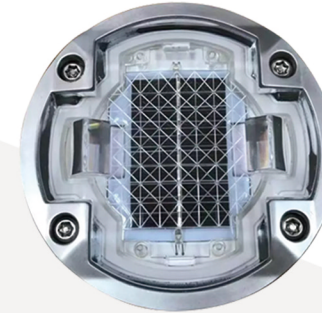

Model	HT-RS-SG5
Solar panel	5V 100ma
Battery	3.2V 1000mAh Lithium battery
Working Model	flashing / steady/delay light
Color	white, yellow, red, green, blue
Visual distance	>1000 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery, 5-8 years for lithium battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	123×48mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.

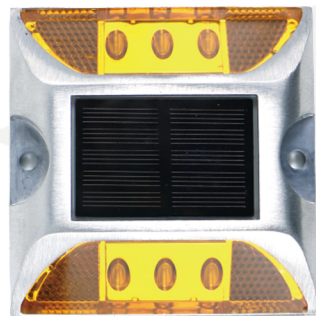

Model	HT-RS-SA1
Solar panel	2.5V 120ma
Battery	1.2V/600mah NI-MH battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	105×105×25mm
Working time	more than 50 hours for steady type, more than 200 hours for flashing type.

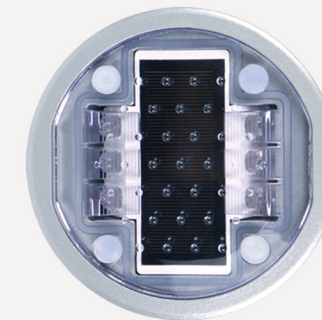

Model	HT-RS-SG3
Solar panel	2.5V 200ma/5V100ma
Battery	1.2V/1500mAh NI-MH battery/3.2V1000mah Lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery, 5-8 years for Lithium battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	135×50mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.




Model	HT-RS-SA3
Solar panel	2.5V 120ma
Battery	1.2V/600mAh NI-MH battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	108×97×25mm
Working time	more than 50 hours for steady type, more than 200 hours for flashing type.




Model	HT-RS-SA6
Solar panel	2.75V 200ma/5.5V 100ma
Battery	1.2V/1500mAh NI-MH battery/3.2V1000mah Lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery
Working temperature	-20°C~+60°C
Waterproof	IP68
Size	125×110×25mm, shank length:50mm
Working time	more than 72 hours for steady type, more than 150 hours for flashing type.

» Solar Road Stud 太阳能道钉

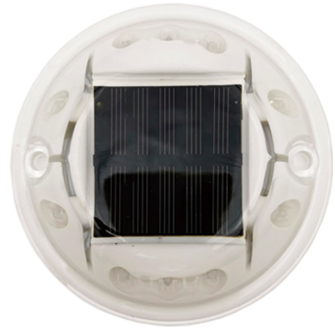

Model	HT-RS-SP1
Solar panel	2.5V 120ma
Battery	1.2V/600mah/1500mah NI-MH battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery, 5-8 years for lithium battery
Working temperature	-20°C~+60°C
Waterproof	IP68
Size	122×25mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.

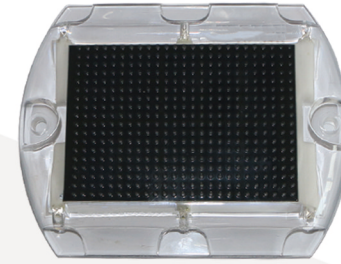



Model	HT-RS-SP2
Solar panel	5.5V/100ma
Battery	3.2V/500mah Lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	5-8 years for lithium battery
Working temperature	-20°C~+60°C
Waterproof	IP68
Size	114×90×11mm
Working time	more than 72hours for steady type, more than 200 hours for flashing type.



Model	HT-RS-SG1
Solar panel	2.5V 140ma /5V 80ma
Battery	1.2V 1500mah NI-MH battery/3.2V 600mah lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery, 5-8 years for lithium battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	101×64mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.




Model	HT-RS-SG1-1
Solar panel	2.5V 140ma /5V 80ma
Battery	1.2V 1500mah NI-MH battery/3.2V 600mah lithium battery
Working Model	flashing / steady
Color	white, yellow, red, green, blue
Visual distance	>800 meters
Control of light intensity	400~500Lux
Lifetime	3-5 years for NI-MH battery, more than 5-8 years for lithium battery
Working temperature	-20°C~+80°C
Waterproof	IP68
Size	113×64mm
Working time	more than 100 hours for steady type, more than 200 hours for flashing type.

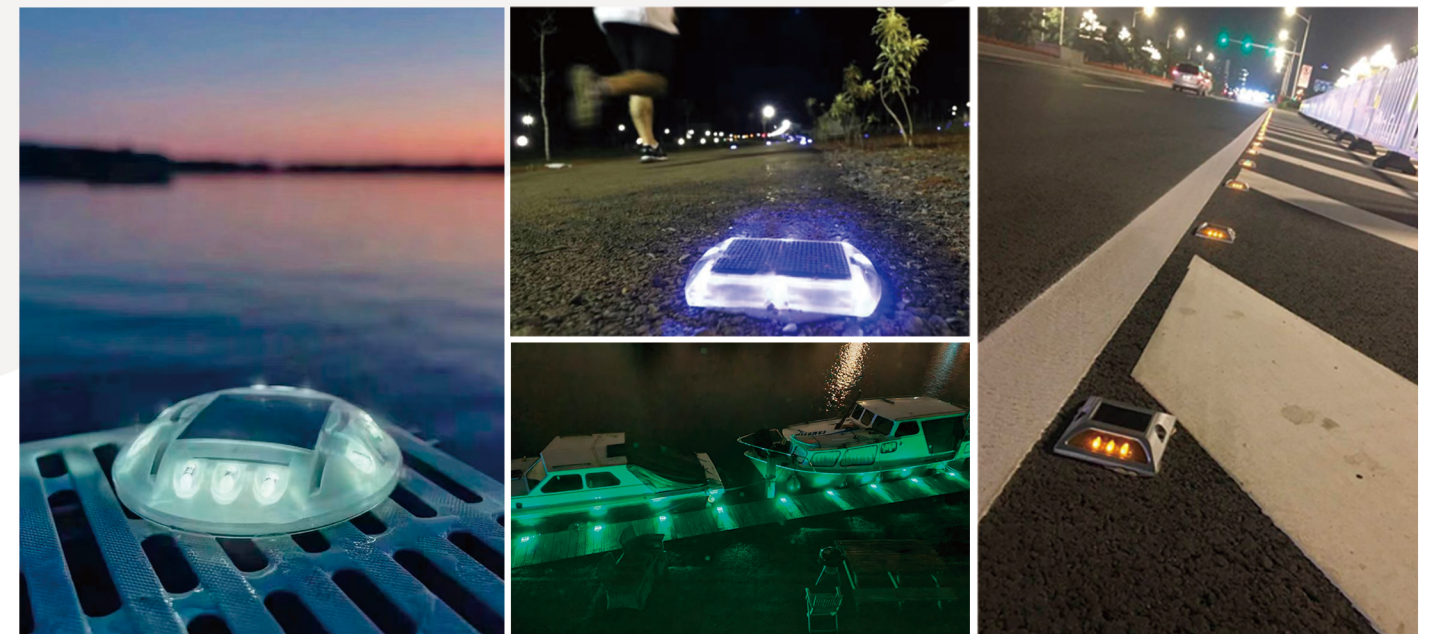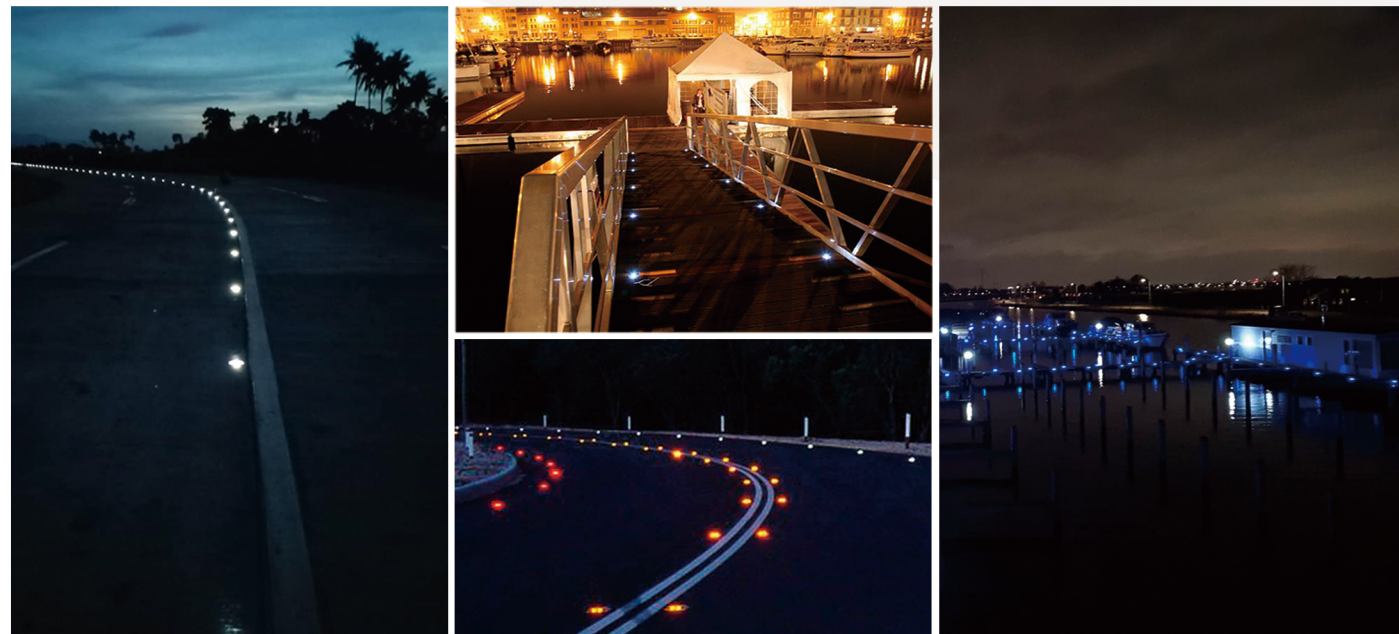


» Solar synchronous road stud 太阳能同步道钉

Bluetooth synchronous solar road studs are advanced road safety devices that use solar power for illumination and incorporate Bluetooth technology for synchronization and control. These road studs are designed to improve road safety, especially during nighttime or adverse weather conditions. Bluetooth synchronous solar road studs are becoming increasingly popular for enhancing road safety and traffic management. They help improve visibility and communication on the road, reducing accidents and improving overall traffic efficiency.

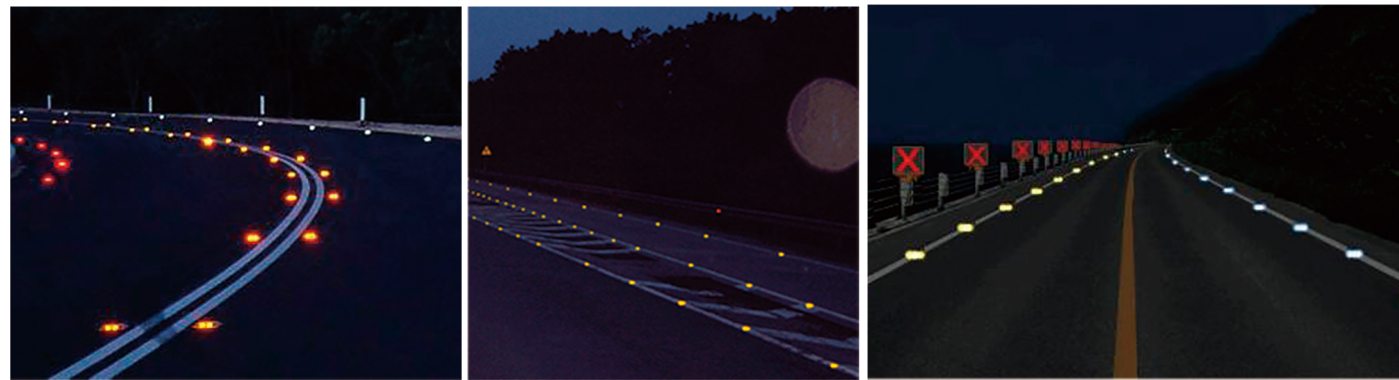

The road stud is equipped with a GPS module that receives signals from GPS satellites in orbit. These signals contain precise time and location information. GPS-based solar road studs offer a reliable and flexible solution for improving road safety and traffic management by ensuring that all road studs flash at the same time, regardless of their distance from each other. This synchronization helps reduce confusion and enhances driver awareness.

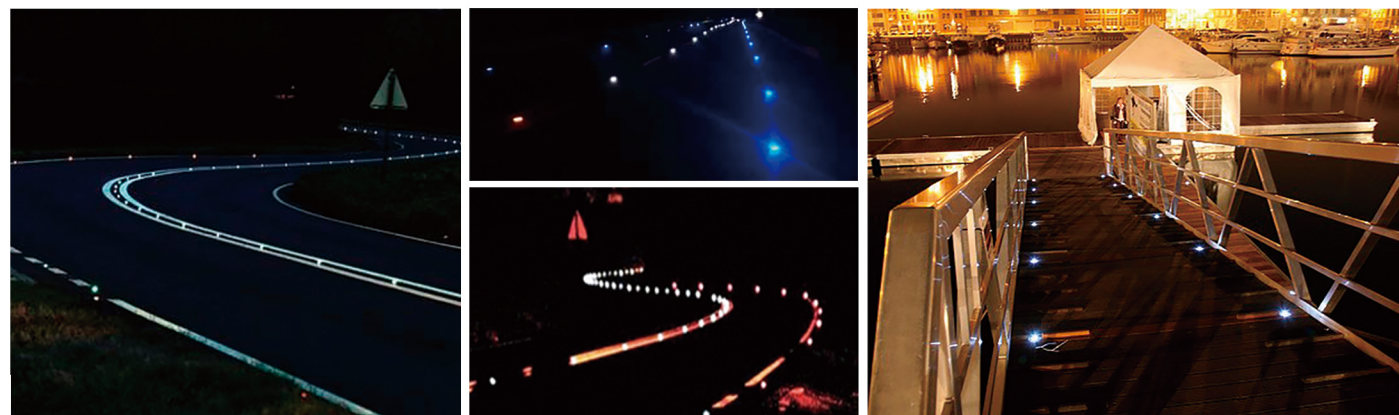


» Smart Zebra Crossing 智慧斑马线





Smart Zebra Crossing, a groundbreaking innovation in road safety, is transforming the way pedestrians navigate urban streets. Combining cutting-edge technology and advanced design principles, this intelligent pedestrian crossing system aims to enhance safety, efficiency, and convenience for both pedestrians and drivers.



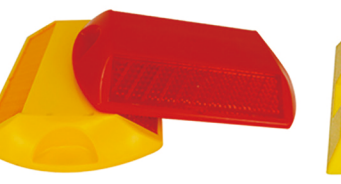


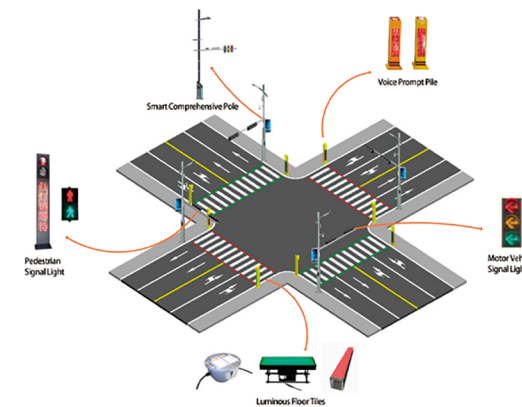
The working principle of smart pedestrian crosswalk studs involves embedded sensors and LED lights to detect pedestrians and vehicles. Based on these detections, the LED lights adjust their brightness and flashing patterns to enhance traffic safety.





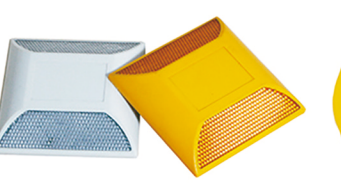

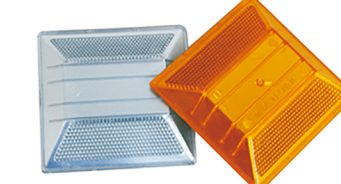» Plastic Road Stud 塑料道钉



			
Model型号: HT-RS-P1	Model型号: HT-RS-P2	Model型号: HT-RS-P3	Model型号: HT-RS-P4
Material材料: ABS塑料	Material材料: ABS+Sand塑料+填沙	Material材料: ABS塑料	Material材料: ABS塑料
Size规格: 100*100*20mm	Size规格: 100*100*20mm	Size规格: 100*100*20mm	Size规格: Ø151mm

			
Model型号: HT-RS-P5	Model型号: HT-RS-P11	Model型号: HT-RS-P12	Model型号: HT-RS-P43
Material材料: ABS塑料	Material材料: ABS塑料	Material材料: ABS塑料	Material材料: ABS塑料
Size规格: 100*100*20mm	Size规格: 102*92*16mm	Size规格: 115*80*17mm	Size规格: 102*101*18mm


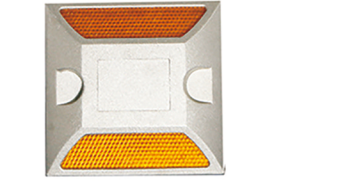


» Glass Road Stud 玻璃道钉


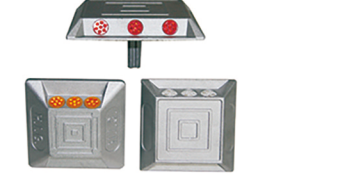
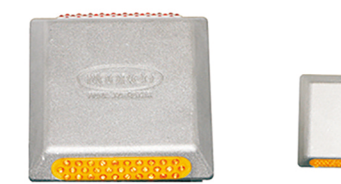

	
Model型号: HT-RS-G1	Model型号: HT-RS-G2
Material材料: Tempered Glass钢化玻璃	Material材料: Tempered Glass钢化玻璃
Size规格: 100*50mm	Size规格: 50*50mm



	
Model型号: HT-RS-G3	Model型号: HT-RS-G4
Material材料: Tempered Glass钢化玻璃	Material材料: Tempered Glass钢化玻璃
Size规格: 100*50mm	Size规格: 50*50mm


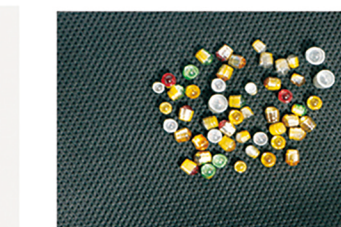





» Aluminum Road Stud 铸铝道钉

			
Model型号: HT-RS-A1	Model型号: HT-RS-A2	Model型号: HT-RS-A3	Model型号: HT-RS-A4
Material材料: Aluminum+Sand铝填沙	Material材料: Aluminum+Sand铝填沙	Material材料: Aluminum+Sand铝填沙	Material材料: Aluminum全铝
Size规格: 100*100*20mm	Size规格: 100*100*20mm	Size规格: 100*100*20mm	Size规格: Ø151mm

			
Model型号: HT-RS-A5	Model型号: HT-RS-A7	Model型号: HT-RS-31	Model型号: HT-RS-43
Material材料: Aluminum全铝	Material材料: Aluminum全铝	Material材料: Aluminum全铝	Material材料: Aluminum全铝
Size规格: 120*120mm	Size规格: 100*100*65/70mm 150*150*50/45mm	Size规格: 100*100*65mm	Size规格: 100*100*50/65/70mm 150*150*55mm

	
AB Glue(道钉胶水)	core-drilling machine 打孔机

	
Name名称: Reflector反光片	Name名称: Cat Eye Beads 反光猫眼
Model型号: 7/19/31/43/45/69/171/258 beads 7/19/31/43/45/69/171/258 珠	Model型号: Ø8*10/Ø10*13/Ø13*18mm

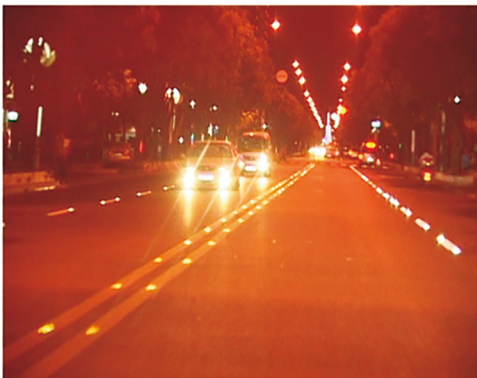» Road Delineator 轮廓标



Bebound Reflector




Rectangle Delineator



Trapezoidal Delineator



Line Delineator

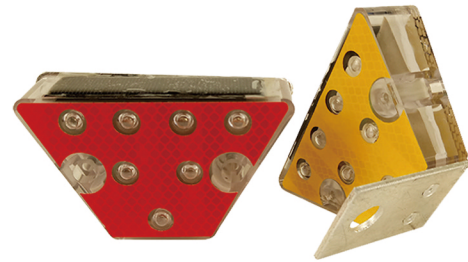

Solar Trapezoidal Delineator



Wire Delineator



Solar Trapezoidal Contour Marker



Road Delineator

» Road Barricade Light 路障灯



Model	HT-BWL-S08
Material	PP
Size	282×180mm
LED light	2 pcs
General function	Flashing-off



Model	HT-BWL-S10
Material	PC+ABS
Size	200×67×270mm
LED light	12 pcs
General function	Flashing-off



Model	HT-BWL-S12
Material	PC+ABS
Size	125×115mm
LED light	12 pcs
General function	Fast flashing-Slow flashing-off



Model	HT-BWL-S02C
Material	AS+PE
Size	382×190mm
LED light	2 pcs
General function	Flashing-off



Model	HT-BWL-S11
Material	PC+ABS
Size	91×56mm
LED light	4 pcs
General function	Flashing-off




Model	HT-BWL-S03A
Material	AS
Size	85×200mm
LED light	6 pcs
General function	Flashing-off

» Warning Light 警示灯



Yellow warning light

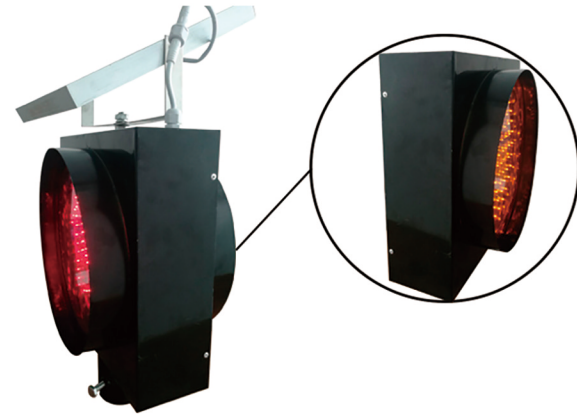

Double side Yellow warning light



Model(型号): HT-SL-01




Model(型号): HT-SL-02




Model(型号): HT-SL-03



Model(型号): HT-AS-01

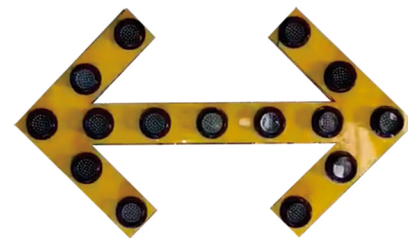

Model(型号): HT-AS-02

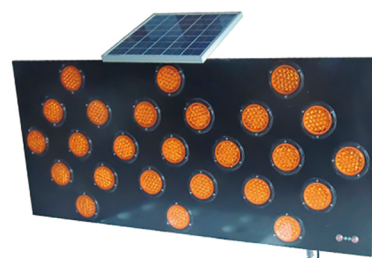

Model(型号): HT-AS-03

» Solar Traffic Sign 太阳能标牌



» Solar Traffic Light 太阳能红绿灯



» Traffic Cone 路锥



Model型号	HT-TC-A45A
Material材料	PVC
High高度	45cm
Weight重量	1.05kg
Base底座	28*28cm



Model型号	HT-TC-A70A
Material材料	PVC
High高度	70cm
Weight重量	1.7kg
Base底座	34.5*34.5cm



Model型号	HT-TC-A70B
Material材料	PVC
High高度	70cm
Weight重量	2.3kg
Base底座	36*36cm



Model型号	HT-TC-A70C
Material材料	PVC
High高度	70cm
Weight重量	1.9kg
Base底座	35*35cm



Model型号	HT-TC-B45A
Material材料	PVC
High高度	45cm
Weight重量	1.45kg
Base底座	27*27cm



Model型号	HT-TC-B45C
Material材料	PVC
High高度	45cm
Weight重量	1.45kg
Base底座	28*28cm



Model型号	HT-TC-B70A
Material材料	PVC
High高度	70cm
Weight重量	2.3kg
Base底座	36*36cm



Model型号	HT-TC-B70C
Material材料	PVC
High高度	70cm
Weight重量	3.2kg
Base底座	36*36cm



Model型号	HT-TC-A902
Material材料	PVC
High高度	90cm
Weight重量	4.1kg
Base底座	36*36cm



Model型号	HT-TC-A903
Material材料	PVC
High高度	90cm
Weight重量	4.5kg
Base底座	36.5*36.5cm



Model型号	HT-TC-A050A
Material材料	PVC
High高度	50cm
Weight重量	1.2kg
Base底座	28*28cm



Model型号	HT-TC-A075C
Material材料	PVC
High高度	75cm
Weight重量	3.2kg
Base底座	40*40cm



Model型号	HT-TC-B75A
Material材料	PVC
High高度	75cm
Weight重量	3.6kg
Base底座	36*36cm



Model型号	HT-TC-B75D
Material材料	PVC
High高度	75cm
Weight重量	2.4/3.2kg
Base底座	36*36cm



Model型号	HT-TC-B90A
Material材料	PVC
High高度	90cm
Weight重量	4.2kg
Base底座	36*36cm



Model型号	HT-TC-B90G
Material材料	PVC
High高度	90cm
Weight重量	4.5kg
Base底座	36*36cm




Speed Bump/Speed Hump


减速带



500*350*50mm

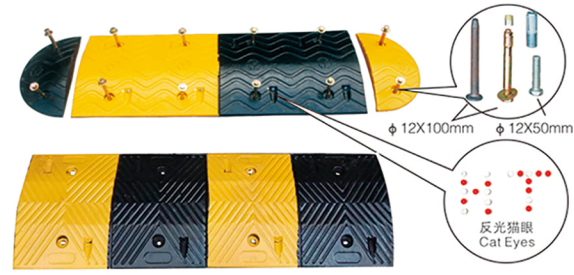

500*350*50mm

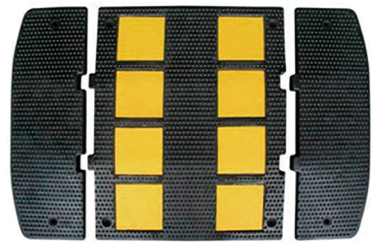

500*600*50mm



500*900*50mm



500*500*50mm



3000*230*50mm



1830*300*50mm

Cable Protector Speed Bump

线槽减速带





HT-CSB-A



HT-CSB-B




HT-CSB-C

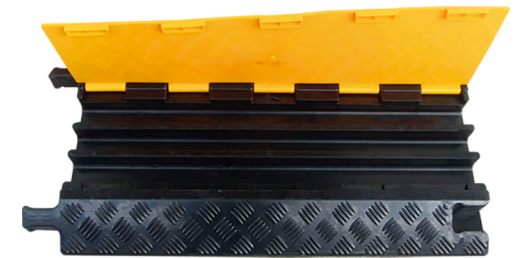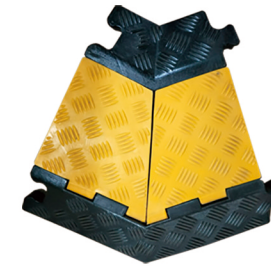

HT-CSB-D



HT-CSB-E

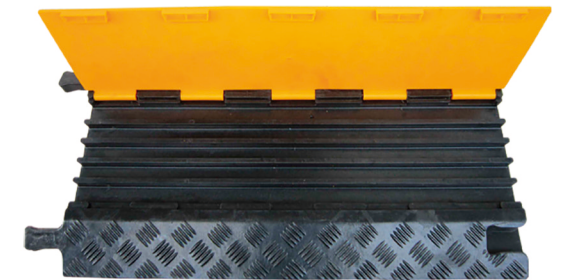

» Wheel Stopper/Corner Protector 定位器/护角




550*150*100mm



1650*160*100mm



600*100*10mm



2000*150*100mm



560*150*100mm



1650*150*100mm



900*150*100mm



1650*160*100mm



800*100*10mm



800*100*6mm



800*100*10mm



Garage Wall Protector Foam

» Road Barrier 防撞桶



HT-JST-04



HT-JST-01



HT-JST-02


» Barrier Fence 护栏



Model : HT-BF-07



Model : HT-BF-03

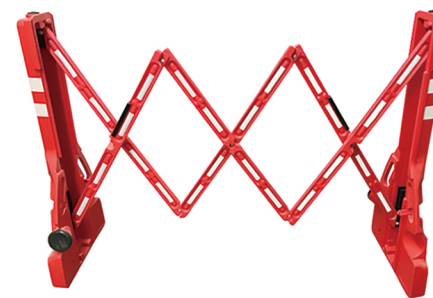

Model : HT-BF-05



Model : HT-BF-01

» Warning Post

警示柱



Model型号	HT-SP-P75A
Material材料	PU
High高度	75cm
Weight重量	1.3kg
Base底座	20cm



Model型号	HT-SP-P75D
Material材料	PU
High高度	75cm
Weight重量	1.1kg
Base底座	20cm



Model型号	HT-SP-E80
Material材料	EVA
High高度	80cm
Weight重量	0.9kg
Base底座	20cm



Model型号	HT-SP-PE95A
Material材料	PE+Rubber
High高度	95cm
Weight重量	2.9kg
Base底座	26cm



Model型号	HT-SP-PE110A
Material材料	PE+Rubber
High高度	110cm
Weight重量	6/8kg
Base底座	40*40*4cm



Model型号	HT-SP-PE110C
Material材料	PE+Rubber
High高度	110cm
Weight重量	6/8kg
Base底座	40*40*4cm



Model型号	HT-SP-M01
Material材料	Iron
High高度	60cm
Weight重量	3.5kg
Base底座	0.4*7cm



Model型号	HT-WP-03
Material材料	PE
High高度	85cm
Weight重量	0.5kg
Base底座	29*29cm



» Lane Separator/Warning Delineator Panel

分道体/警示板




Model型号	HT-FD-75
Material材料	Rubber
High高度	75cm
Weight重量	11.25kg
Base底座	78*21*12cm



Model型号	HT-FL-02
Material材料	Rubber
High高度	12cm
Weight重量	8.3kg
Base底座	82*21cm



Model型号	HT-FD-78A
Material材料	TPU
High高度	100cm
Weight重量	4.5kg
Base底座	100*20*8.5cm

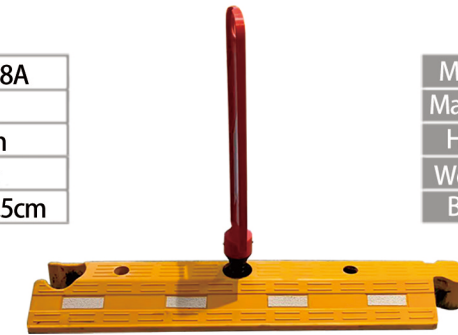

Model型号	HT-FD-110
Material材料	PE+Rubber
High高度	72cm
Weight重量	11kg
Base底座	110*24*10cm



Model型号	HT-JSB-05
Material材料	PE
High高度	110cm
Weight重量	18kg
Base底座	40*80cm



Model型号	HT-JSB-06
Material材料	PE
High高度	110cm
Weight重量	13kg
Base底座	50*50*4.5cm



» Roller Barrier 滚筒护栏




A roller barrier, also known as a roller guard or a roller barrier system, is a safety device used to prevent or mitigate accidents on roads, highways, and other transportation infrastructure. It is designed to enhance road safety by redirecting or absorbing the energy of vehicles that veer off the road or collide with the barrier.



» Thermoplastic Paint Preheater 热熔釜

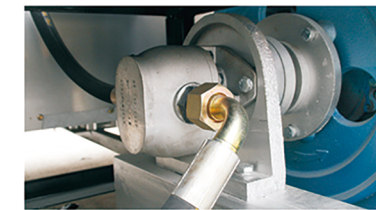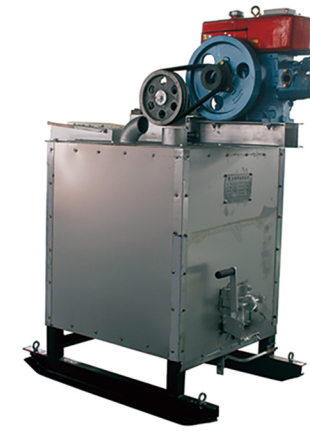

» Thermoplastic Road Marking Machine 划线机

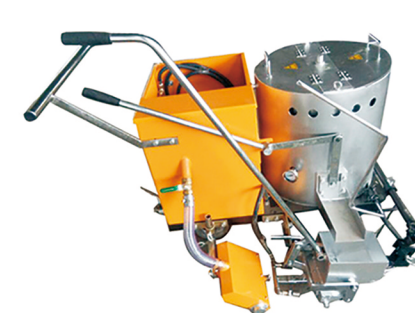

HXJ-01



HXJ-04



座驾式



Traffic Paint (涂料)



Glass Beads (玻璃微珠)

» Road Marking Tape 预成型标线贴

Road marking tape called premolding road marking tape it's a new type of roading marking matericals. Whether straight line, words or complex design direction arrow, are all in made in factory prefabricated. When construction site its only simple process can paste the road surface. Compared with the traditional hot melt lines, its constructionis convenient and easy to operation. More environmental protection and safety. Especially in traditional materials difficult to complete design, words, but this type can make the line beautiful , its more obvious advantage in this part. Meanwhile, factory produce the marking tape quality stable, with the high reflective, high durability and easy remove characteristics. It has been extensively used in China and abroad.




» Warning Tape 警示带

Customized according to clients' request.



» Reflective Sheet/Reflective Tape 反光膜/反光晶格

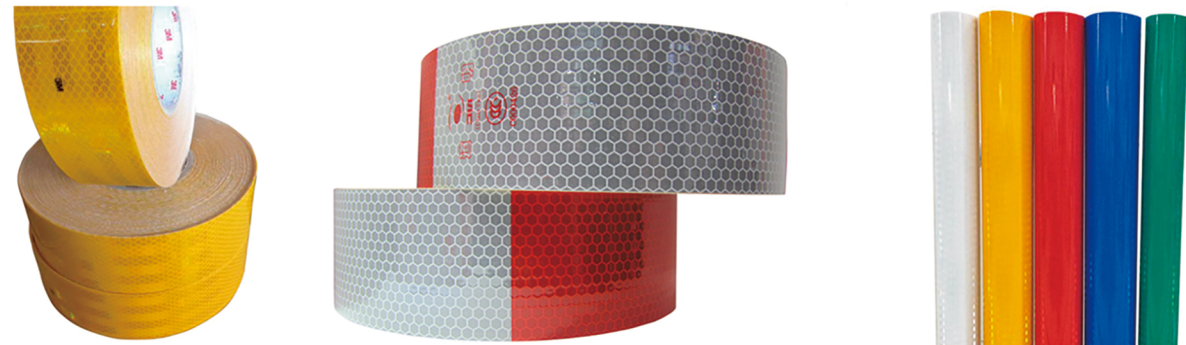

» Other Products 其他产品

